

LIDA® Rod Anodes



LIDA® Rod Anodes

LIDA® Rod Anodes are comprised of a titanium substrate with a mixed metal oxide coating. The mixed metal oxide is a crystalline, electrically-conductive coating that activates the titanium and enables it to function as an anode.

Anode Life — Due to the extremely low consumption rates and dimensional stability of mixed metal oxide anodes, the electrical resistance of LIDA® Rod Anodes remain essentially constant with time.

The high current density capacity of De Nora mixed metal oxide anodes has the added advantage of allowing high current overloads for initial polarization without causing harm to the anode.

Anode life projections are accurately made using the lifetime graphs (See Figures 1-7 on back).

De Nora LIDA® Rod Anodes are available in the following standard sizes:

- 1/8" x 4'
- 1/4" x 4'
- 1/2" x 4'
- 3/4" x 4'

Selection of the anode coating is based on operating environment:

- FW** Freshwater or Brackish Water
- SWT** Seawater

APPLICATIONS

- Process Vessels
- Water Condenser Boxes
- Heat Exchangers
- Water Intake Structures

FEATURES

- High Current Output
- Low Coating Wear Rate
- Five Year Product Warranty
- Also available as Rod Anode Assemblies

BENEFITS

- Lower Cost Per Ampere Year
- Constant Electrical Resistance
- No Hassles







Standard Rod Assemblies

| Part Number | Freshwater or Brackish Water | | Sea Water Environments | |
|----------------------------------|------------------------------|---------------------|------------------------|---------------------|
| | FA-ROD 0.5FW | FA-ROD 0.75FW | FA-ROD 0.5SW | FA-ROD 0.75SW |
| Max. current output | 1.6amps | 2.4 amps | 9.7 amps | 14.6 amps |
| Rod Diameter | 0.5 inch (1.27 cm) | 0.75 inch (1.91 cm) | 0.5 inch (1.27 cm) | 0.75 inch (1.91 cm) |
| Total Length | 24 inch (61 cm) | 24 inch (61 cm) | 24 inch (61 cm) | 24 inch (61 cm) |
| Active Length max-User specified | 16 inch (41 cm) | 16 inch (41 cm) | 16 inch (41 cm) | 16 inch (41 cm) |
| FRP Length | 6 inch (15 cm) | 6 inch (15 cm) | 6 inch (15 cm) | 6 inch (15 cm) |
| Maximum water velocity | 2ft/sec (.6 M/sec) | 5ft/sec (1.5 M/sec) | 2ft/sec (.6 M/sec) | 5ft/sec (1.5 M/sec) |



CATHODIC PROTECTION

LIDA® Rod Anodes

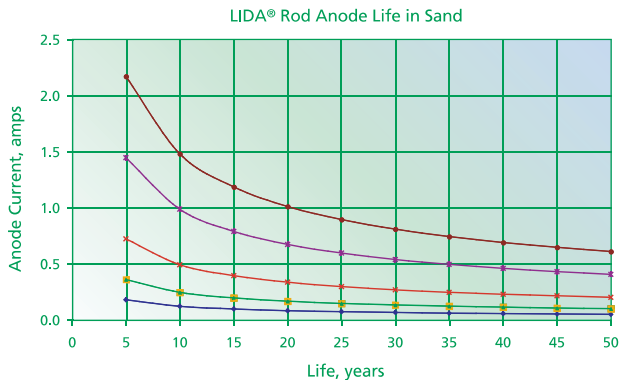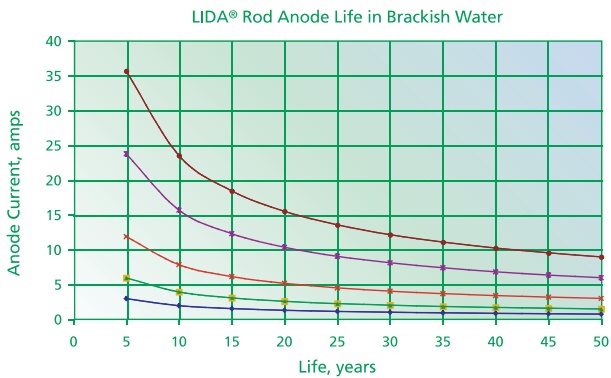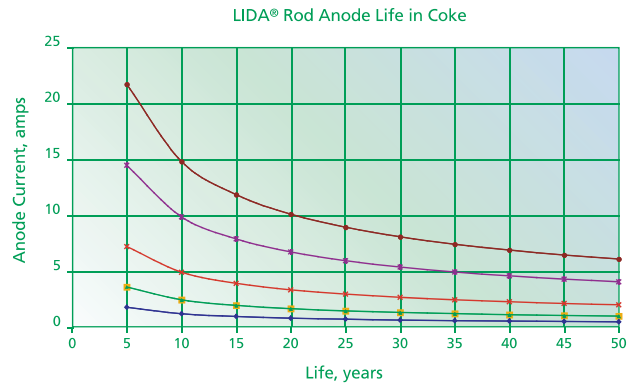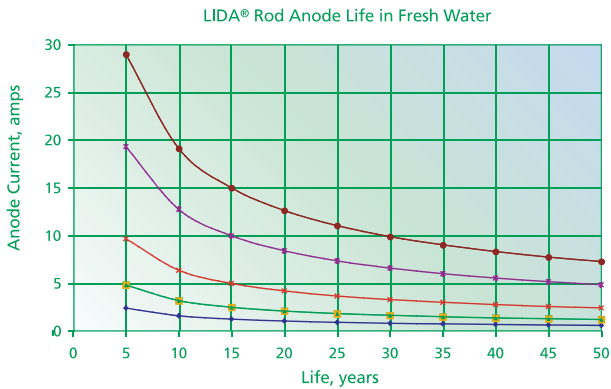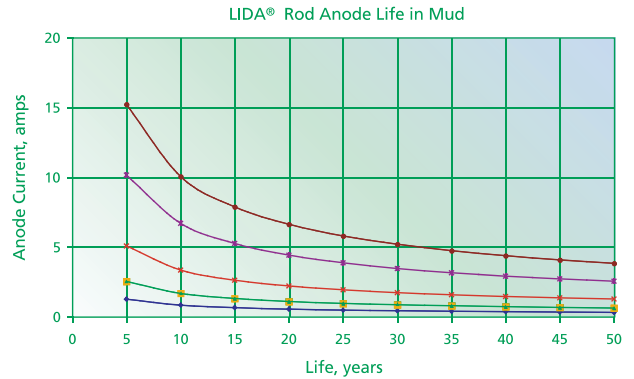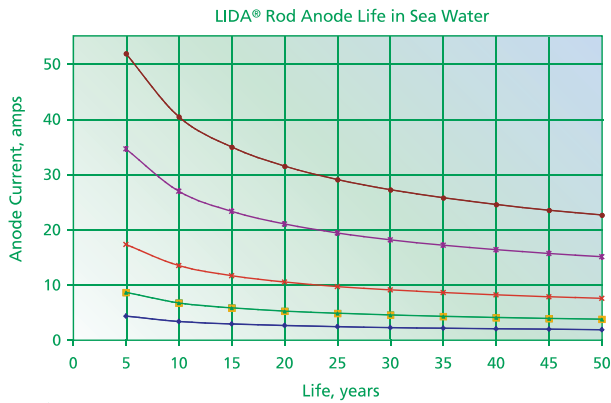

Maximum Current for LIDA® Rod Anodes (life in years)

- 1/8 Rod, STD
- 1/8 Rod, XL
- 1/4 Rod, STD
- 1/4 Rod, XL
- 1/2 Rod, XL
- 3/4 Rod, XL

**STD = standard
XL = extended life**

Lifetimes for the 1/4" STD and the 1/8" XL are equivalent.



www.denora.com

Durantes Vincunt

Industrie De Nora - Via Bistolfi, 35 - 20134 Milan, Italy - ph +39 02 21291 - fax +39 02 2129 2363 - mail info.products@denora.com

All information, recommendations and suggestions appearing herein concerning the use of our products are based upon tests and data believed to be reliable. However, it is the user's responsibility to determine the suitability for his own use of the products described herein. Since the actual use by others is beyond our control, no guarantee, expressed or implied, is made by De Nora as to the effects of such use or the results to be obtained, nor does De Nora assume any liability arising out of the use by others of the products referred to herein. In addition, the information herein is not to be construed as absolutely complete since additional information may be necessary or desirable when particular circumstances exist or because of applicable laws or government regulations. Nothing herein contained is to be construed as a recommendation to infringe any patent.